


WITHDRAWABLE CIRCUIT BREAKER WITH GUIDE
FRAME 3-POLE, SIZE II, IEC IN=2500A TO 690V,
AC50/60HZ ICU=66KA AT 500V REAR CONNECTION
HORIZONTAL

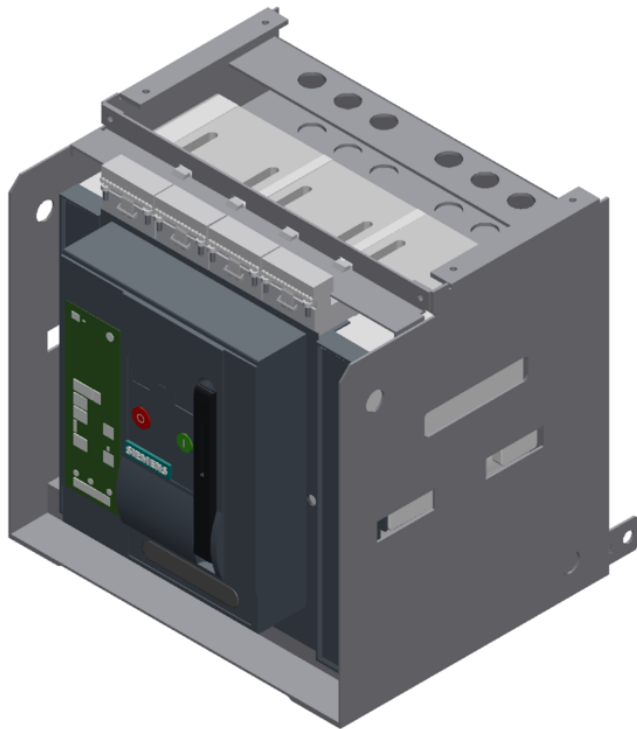

Further information

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL1225-2DG36-1AA2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WL1225-2DG36-1AA2>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL1225-2DG36-1AA2


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

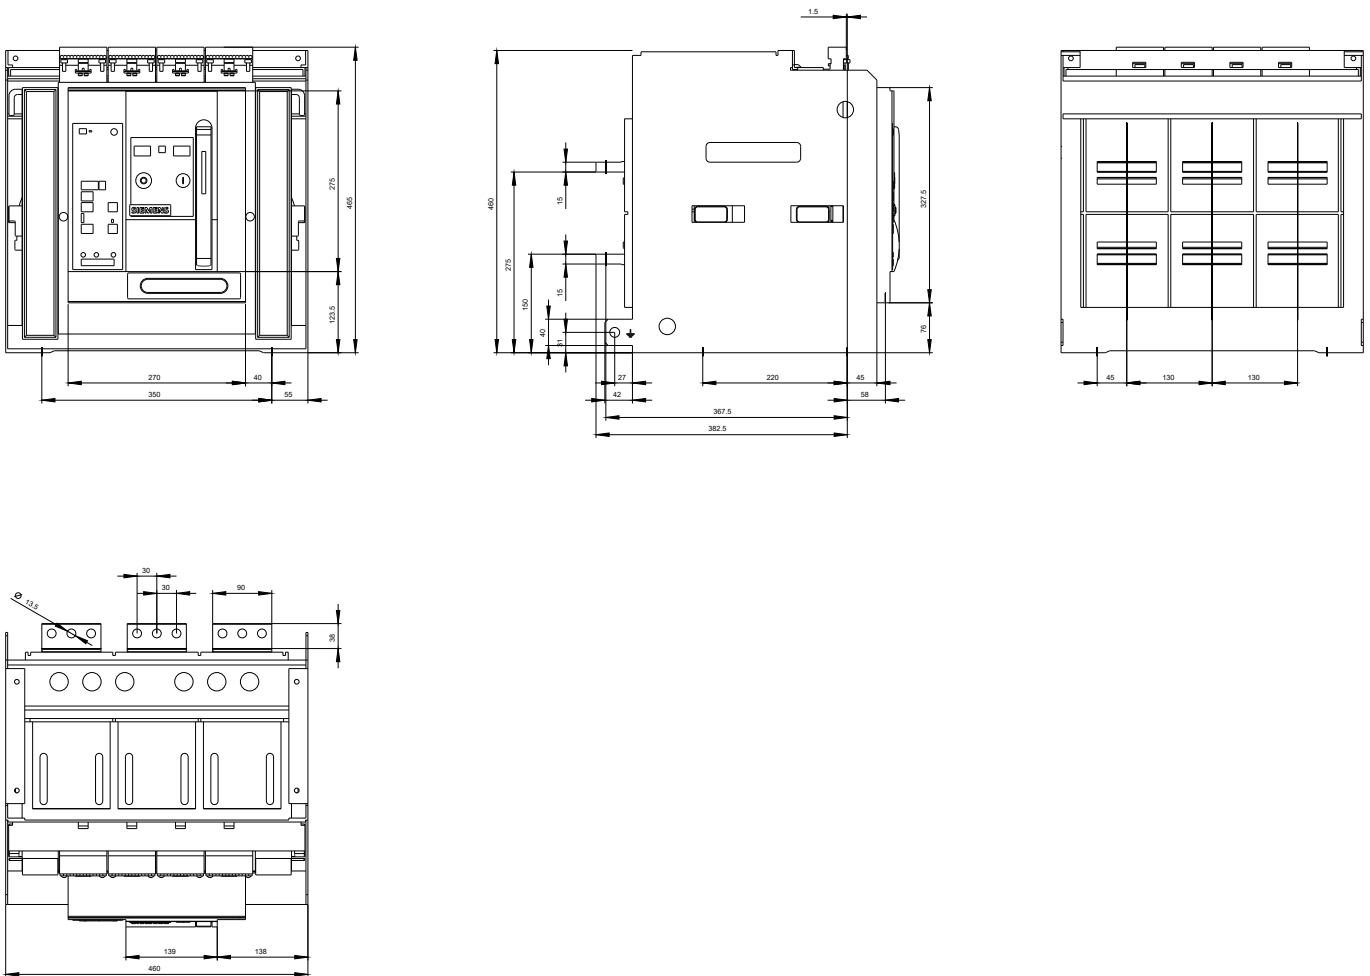

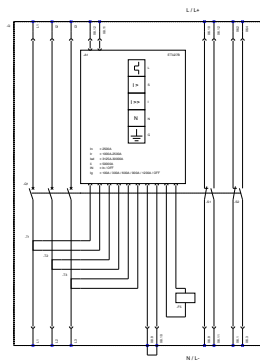

1. Schalter, 2. Schalter, 3. Schalter, 4. Schalter, 5. Schalter, 6. Schalter, 7. Schalter, 8. Schalter, 9. Schalter, 10. Schalter

last modified:

04/12/2018