



CONTACTOR,AC3:22KW/400V, 1NO+1NC, 230V AC 50HZ, 3-POLE, SIZE S2, SCREW TERMINAL

Figure similar

<b>product brand name</b>	SIRIUS
<b>Product designation</b>	3RT2 contactor
<b>General technical data:</b>	
<b>Size of contactor</b>	S2
<b>Product expansion</b>	
• function module for communication	No
• Auxiliary switch	Yes
<b>Insulation voltage</b>	
• Rated value	690 V
<b>Surge voltage resistance Rated value</b>	6 kV
<b>maximum permissible voltage for safe isolation between coil and main contacts acc. to EN 60947-1</b>	400 V
<b>Protection class IP</b>	
• on the front	IP00
• of the terminal	IP00
<b>Degree of pollution</b>	3
<b>Shock resistance</b>	
• at rectangular impulse	
— at AC	11.8g / 5 ms, 7.4g / 10 ms
• with sine pulse	
— at AC	18.5g / 5 ms, 11.6g / 10 ms
<b>Mechanical service life (switching cycles)</b>	
• of the contactor typical	10 000 000
• of the contactor with added electronics-compatible auxiliary switch block typical	5 000 000

• of the contactor with added auxiliary switch block typical	10 000 000
--	------------

#### Ambient conditions:

<b>Installation altitude at height above sea level maximum</b>	2 000 m
<b>Ambient temperature</b>	
• during operation	-25 ... +60 °C
• during storage	-55 ... +80 °C

#### Main circuit:

<b>Number of NO contacts for main contacts</b>	3
<b>Number of NC contacts for main contacts</b>	0
<b>Operating voltage</b>	
• at AC-3 Rated value maximum	690 V
<b>Operating current</b>	
• at AC-1 at 400 V	
— at ambient temperature 40 °C Rated value	70 A
• at AC-1 up to 690 V	
— at ambient temperature 40 °C Rated value	70 A
— at ambient temperature 60 °C Rated value	60 A
• at AC-2 at 400 V Rated value	51 A
• at AC-3	
— at 400 V Rated value	51 A
— at 500 V Rated value	50 A
— at 690 V Rated value	24 A
<b>Connectable conductor cross-section in main circuit at AC-1</b>	
• at 60 °C minimum permissible	16 mm <sup>2</sup>
• at 40 °C minimum permissible	25 mm <sup>2</sup>
<b>Operating current for ≥ 200000 operating cycles at AC-4</b>	
• at 400 V Rated value	24 A
• at 690 V Rated value	20 A
<b>Operating current</b>	
• with 1 current path at DC-1	
— at 24 V Rated value	55 A
— at 110 V Rated value	4.5 A
— at 220 V Rated value	1 A
— at 440 V Rated value	0.4 A
— at 600 V Rated value	0.25 A
• with 2 current paths in series at DC-1	
— at 24 V Rated value	55 A
— at 110 V Rated value	45 A

— at 220 V Rated value	5 A
— at 440 V Rated value	1 A
— at 600 V Rated value	0.8 A
• with 3 current paths in series at DC-1	
— at 24 V Rated value	55 A
— at 110 V Rated value	55 A
— at 220 V Rated value	45 A
— at 440 V Rated value	2.9 A
— at 600 V Rated value	1.4 A
<b>Operating current</b>	
• with 1 current path at DC-3 at DC-5	
— at 24 V Rated value	35 A
— at 110 V Rated value	2.5 A
— at 220 V Rated value	1 A
— at 440 V Rated value	0.1 A
— at 600 V Rated value	0.06 A
• with 2 current paths in series at DC-3 at DC-5	
— at 110 V Rated value	25 A
— at 220 V Rated value	5 A
— at 24 V Rated value	55 A
— at 440 V Rated value	0.27 A
— at 600 V Rated value	0.16 A
• with 3 current paths in series at DC-3 at DC-5	
— at 110 V Rated value	55 A
— at 220 V Rated value	25 A
— at 24 V Rated value	55 A
— at 440 V Rated value	0.6 A
— at 600 V Rated value	0.35 A
<b>Operating power</b>	
• at AC-1	
— at 230 V Rated value	26 kW
— at 230 V at 60 °C Rated value	23 kW
— at 400 V Rated value	46 kW
— at 400 V at 60 °C Rated value	39 kW
— at 690 V Rated value	79 kW
— at 690 V at 60 °C Rated value	68 kW
• at AC-2 at 400 V Rated value	22 kW
• at AC-3	
— at 230 V Rated value	15 kW
— at 400 V Rated value	22 kW
— at 500 V Rated value	30 kW

— at 690 V Rated value	22 kW
<b>Operating power for ≥ 200000 operating cycles at AC-4</b>	
• at 400 V Rated value	12.6 kW
• at 690 V Rated value	18.2 kW
<b>Thermal short-time current restricted to 10 s</b>	420 A
<b>Active power loss at AC-3 at 400 V for rated value of the operating current per conductor</b>	4 W
<b>No-load switching frequency</b>	
• at AC	5 000 1/h
<b>Operating frequency</b>	
• at AC-1 maximum	1 000 1/h
• at AC-2 maximum	600 1/h
• at AC-3 maximum	800 1/h
• at AC-4 maximum	250 1/h

<b>Control circuit/ Control:</b>	
<b>Type of voltage of the control supply voltage</b>	AC
<b>Control supply voltage at AC</b>	
• at 50 Hz Rated value	230 V
<b>Operating range factor control supply voltage rated value of the magnet coil at AC</b>	
• at 50 Hz	0.8 ... 1.1
<b>Apparent pick-up power of the magnet coil at AC</b>	
• at 50 Hz	190 V·A
<b>Apparent holding power of the magnet coil at AC</b>	
• at 50 Hz	16 V·A
<b>Closing delay</b>	
• at AC	10 ... 80 ms
<b>Arcing time</b>	10 ... 20 ms

<b>Auxiliary circuit:</b>	
<b>Number of NC contacts</b>	
• for auxiliary contacts	
— instantaneous contact	1
<b>Number of NO contacts</b>	
• for auxiliary contacts	
— instantaneous contact	1
<b>Operating current at AC-12 maximum</b>	10 A
<b>Operating current at AC-15</b>	
• at 230 V Rated value	10 A
• at 400 V Rated value	3 A
• at 500 V Rated value	2 A
• at 690 V Rated value	1 A

<b>Operating current at DC-12</b>	
<ul style="list-style-type: none"> <li>• at 24 V Rated value</li> <li>• at 48 V Rated value</li> <li>• at 60 V Rated value</li> <li>• at 110 V Rated value</li> <li>• at 125 V Rated value</li> <li>• at 220 V Rated value</li> <li>• at 600 V Rated value</li> </ul>	<p>10 A</p> <p>6 A</p> <p>6 A</p> <p>3 A</p> <p>2 A</p> <p>1 A</p> <p>0.15 A</p>
<b>Operating current at DC-13</b>	
<ul style="list-style-type: none"> <li>• at 24 V Rated value</li> <li>• at 48 V Rated value</li> <li>• at 60 V Rated value</li> <li>• at 110 V Rated value</li> <li>• at 125 V Rated value</li> <li>• at 220 V Rated value</li> <li>• at 600 V Rated value</li> </ul>	<p>10 A</p> <p>2 A</p> <p>2 A</p> <p>1 A</p> <p>0.9 A</p> <p>0.3 A</p> <p>0.1 A</p>
<b>Contact reliability of the auxiliary contacts</b>	1 faulty switching per 100 million (17 V, 1 mA)

#### UL/CSA ratings:

<b>Full-load current (FLA) for three-phase AC motor</b>	
<ul style="list-style-type: none"> <li>• at 480 V Rated value</li> <li>• at 600 V Rated value</li> </ul>	<p>52 A</p> <p>52 A</p>
<b>yielded mechanical performance [hp]</b>	
<ul style="list-style-type: none"> <li>• for single-phase AC motor <ul style="list-style-type: none"> <li>— at 110/120 V Rated value</li> <li>— at 230 V Rated value</li> </ul> </li> <li>• for three-phase AC motor <ul style="list-style-type: none"> <li>— at 200/208 V Rated value</li> <li>— at 220/230 V Rated value</li> <li>— at 460/480 V Rated value</li> <li>— at 575/600 V Rated value</li> </ul> </li> </ul>	<p>3 hp</p> <p>10 hp</p> <p>15 hp</p> <p>15 hp</p> <p>40 hp</p> <p>50 hp</p>
<b>Contact rating of the auxiliary contacts acc. to UL</b>	A600 / P600

#### Short-circuit:

<b>Design of the fuse link</b>	
<ul style="list-style-type: none"> <li>• for short-circuit protection of the main circuit <ul style="list-style-type: none"> <li>— with type of assignment 1 required</li> <li>— with type of assignment 2 required</li> </ul> </li> <li>• for short-circuit protection of the auxiliary switch required</li> </ul>	<p>gL/gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 160 A</p> <p>gL/gG NH 3NA, DIAZED 5SB, NEOZED 5SE: 80 A</p> <p>fuse gL/gG: 10 A</p>

#### Installation/ mounting/ dimensions:





<b>mounting position</b>	+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface
<b>Mounting type</b>	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022
<ul style="list-style-type: none"> <li>• Side-by-side mounting</li> </ul>	Yes
<b>Height</b>	114 mm
<b>Width</b>	55 mm
<b>Depth</b>	130 mm
<b>Required spacing</b>	
<ul style="list-style-type: none"> <li>• with side-by-side mounting <ul style="list-style-type: none"> <li>— forwards</li> <li>— Backwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> <li>• for grounded parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— Backwards</li> <li>— upwards</li> <li>— at the side</li> <li>— downwards</li> </ul> </li> <li>• for live parts <ul style="list-style-type: none"> <li>— forwards</li> <li>— Backwards</li> <li>— upwards</li> <li>— downwards</li> <li>— at the side</li> </ul> </li> </ul>	0 mm 0 mm 0 mm 0 mm 0 mm  0 mm 0 mm 50 mm 6 mm 50 mm  0 mm 0 mm 50 mm 50 mm 6 mm

Connections/ Terminals:	
<b>Type of electrical connection</b>	
<ul style="list-style-type: none"> <li>• for main current circuit</li> <li>• for auxiliary and control current circuit</li> </ul>	screw-type terminals screw-type terminals
<b>Type of connectable conductor cross-section</b>	
<ul style="list-style-type: none"> <li>• for main contacts <ul style="list-style-type: none"> <li>— single or multi-stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• for AWG conductors for main contacts</li> </ul>	2x (1 ... 35 mm <sup>2</sup> ), 1x (1 ... 50 mm <sup>2</sup> ) 2x (1 ... 25 mm <sup>2</sup> ), 1x (1 ... 35 mm <sup>2</sup> ) 2x (18 ... 2), 1x (18 ... 1)
<b>Type of connectable conductor cross-section</b>	
<ul style="list-style-type: none"> <li>• for auxiliary contacts <ul style="list-style-type: none"> <li>— single or multi-stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>• for AWG conductors for auxiliary contacts</li> </ul>	2x (0,5 ... 1,5 mm <sup>2</sup> ), 2x (0,75 ... 2,5 mm <sup>2</sup> ) 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> ) 2x (20 ... 16), 2x (18 ... 14)

## Safety related data:

<b>Proportion of dangerous failures</b>	
• with low demand rate acc. to SN 31920	40 %
• with high demand rate acc. to SN 31920	73 %
<b>Product function</b>	
• Mirror contact acc. to IEC 60947-4-1	Yes
• positively driven operation acc. to IEC 60947-5-1	No

## Certificates/ approvals:

General Product Approval	Declaration of Conformity	Test Certificates	other		
 CSA		 UL	 EG-Konf.	<a href="#">Typprüfbescheinigung/Werkszeugnis</a>	<a href="#">Bestätigungen</a>

### other

[Umweltbestätigung](#)

## Further information

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

### Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

### Cax online generator


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT20361AP00>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT20361AP00>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RT20361AP00&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT20361AP00&lang=en)

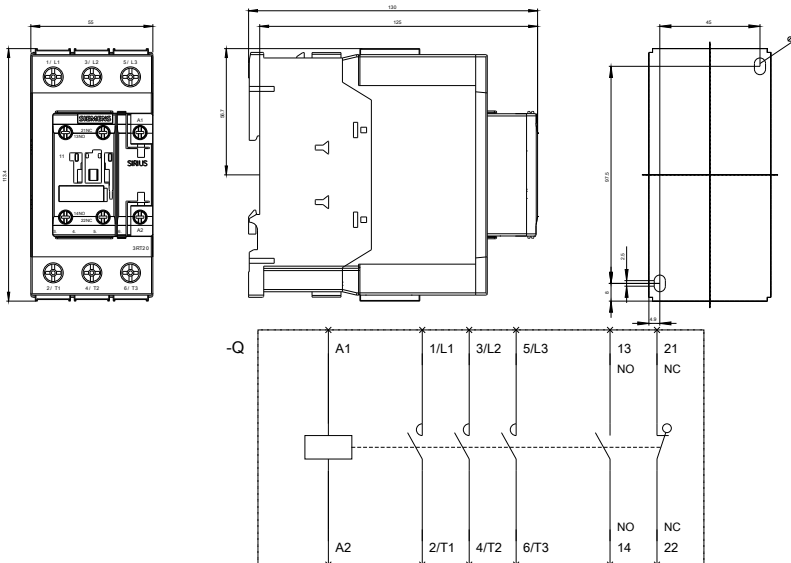

last modified:

29.06.2015