

CIRCUIT BREAKER 400V 10KA, 3POLE, C, 63A



Model		
product brand name		SETRON
Product designation		Miniature circuit breakers
Design of the product		5SL miniature circuit breakers
General technical data		
Number of poles		3
Number of poles / Note		3P
Tripping characteristic class		C
circuit-breaker / Design		5SL4
Mechanical service life (switching cycles) / typical		10 000
Overvoltage category		3
Voltage		
Type of voltage		AC/DC
Insulation voltage		
<ul style="list-style-type: none"> with multi-phase operation / at AC / rated value 	V	440
Supply voltage		
Supply voltage frequency / rated value	Hz	50

Protection class		
Protection class IP		IP20, with connected conductors
Energy limiting class		3
Switching capacity		
Switching capacity current		
• acc. to EN 60898 / rated value	kA	10
• acc. to IEC 60947-2 / rated value	kA	10
Dissipation		
Power loss [W]		
• for rated value of the current / at AC / in hot operating state / per pole	W	5.04
• maximum	W	15
Electricity		
rated current I _n / IEC, DIN/VDE / at 40 Cel	A	59.67
Current / at AC / rated value	A	63
Main circuit		
Operating voltage		
• minimum	V	24
• at DC / rated value / maximum	V	60
• with multi-phase operation / at AC / maximum	V	440
Product details		
Product feature / Touch protection		Yes
Product feature		
• halogen-free		Yes
• sealable		Yes
• silicon-free		Yes
Product extension / can be installed / supplementary devices		Yes
Product function		
Product function / neutral conductor switching		No
Number		
Number of test cycles / for environmental testing / acc. to IEC 60068-2-30		6
Connections		
Connectable conductor cross-section / stranded		
• minimum	mm ²	0.75
• maximum	mm ²	35
Connectable conductor cross-section		
• solid		

— minimum	mm ²	0.75
— maximum	mm ²	35
• finely stranded / with core end processing		
— minimum	mm ²	0.75
— maximum	mm ²	25
Tightening torque / with screw-type terminals		
• minimum	N·m	2.5
• maximum	N·m	3

Mechanical Design

Height	mm	90
Width	mm	54
Depth	mm	76
Mounting position		any
Installation depth	mm	70
Number of width units		3
Net weight	g	467

Environmental conditions

Degree of pollution		2
Influence of the surrounding temperature		+55 °C, max. 95% humidity
Ambient temperature		
• minimum	°C	-25
• maximum	°C	55
• during storage / minimum	°C	-40
• during storage / maximum	°C	75

Certificates

Equipment marking		
• acc. to DIN EN 61346-2		F
• acc. to DIN EN 81346-2		F

General Product Approval

Declaration of Conformity



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5SL43637>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5SL43637/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SL43637

CAx-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

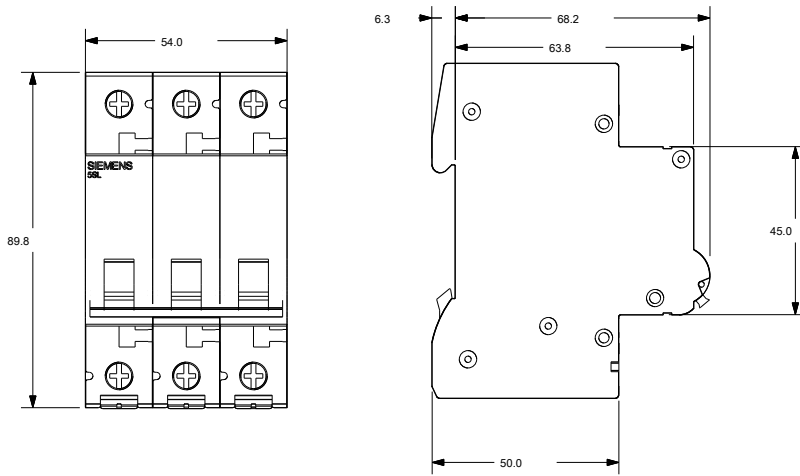

last modified:

09.06.2016